

Nursery Assembly Guide

What's included:

Parts:

2x



Legs

6x



Rungs


Tools & fixings:

12x



M6x30
Bolts

1 x



4mm
Allen Key



Note: Ensure dowels are pushed home in their recesses before tightening screws – a gentle tap with a small rubber mallet or the heel of your hand should help




What you will need:

- Competent adult supervision

Products covered in this guide:

Name	MPN	GTIN
Nursery Natural Ladder	LPKLAD-NI-NAT	5060632681669
Nursery Gretton Grey Ladder	LPKLAD-NI-GG	5060632681720
Nursery Pastel Rainbow Ladder	LPKLAD-NI-PR	5060632681782

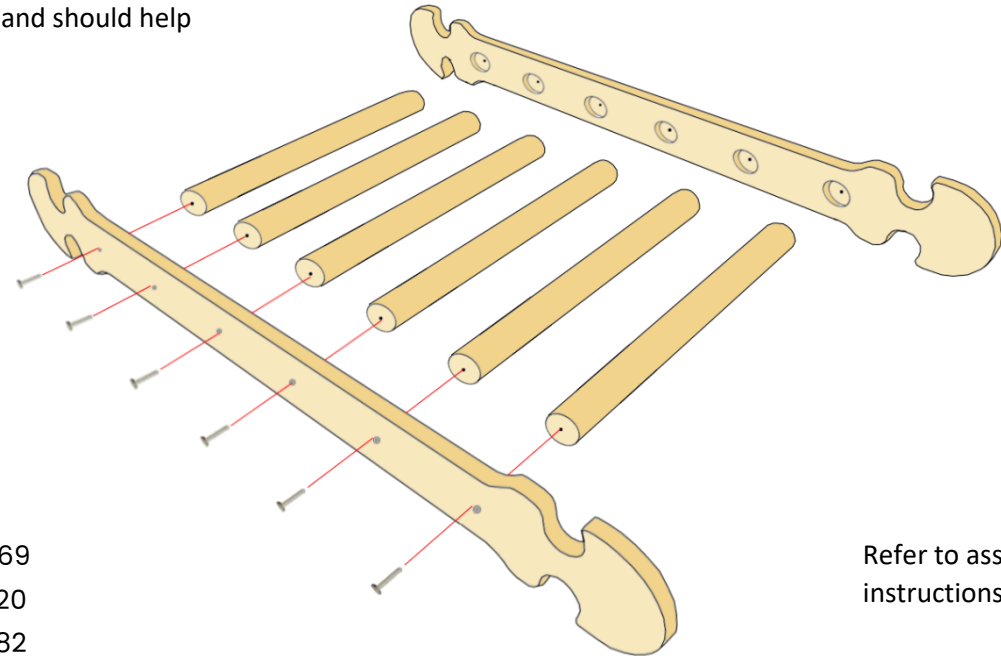

Refer to assembly instructions overleaf

Assembly instructions:

Please refer to diagrams overleaf

1. The Nursery Ladder should be assembled by a competent adult
2. Lay one leg flat on the floor
3. Insert a rung into each recess
4. With all rungs vertical, place the other leg on top, align and fit rungs into each recess
5. Ensuring correct alignment insert M6x30 bolts and finger tighten into the embedded female threads
6. Carefully turn over and repeat step 5 on the other side
7. When all rungs are seated correctly tighten with the supplied Allen key

Do contact us if you are unsure of the assembly instructions



We recommend keeping these assembly instructions in a safe place for future reference. You can also scan the QR code for an electronic copy

Batch No.:

Warnings:

- The recommended minimum age for the Ladder 10months+
- The maximum number of users at any one time is 2
- The maximum weight per user is 50kg (.∴max 100kg)
- The Ladder is for indoor use – it can be used outdoors with care

Recommendations:

- Adult assembly & supervision recommended at all times
- The Ladder should be positioned at least 2m from any structure that could cause an obstruction
- The Ladder should not be installed over any hard surface
- Take care with orientation! Where there may be exposure to the sun, glare can impede climbing

Maintenance:

- Regular checks should be carried out before and during use to ensure safe use of ladders
- These checks include:
 - Nuts & bolts (inspect & tighten as appropriate)
 - Visual inspection for any evidence of deterioration
- Replace defective parts as per manufacturer's instructions
- A wipe over with a damp cloth after use will help maintain the ladder in good order
- Failure to carry out checks & maintenance may result in products overturning or becoming hazards

LIGNEUS PLAY